



FunderMax GmbH
Industriezentrum NÖ-Süd
2355 Wr. Neudorf

Vienna City Administration
MUNICIPAL DEPARTMENT 39 (MA 39)
Research Centre, Laboratory and
Certification Services of the City of Vienna
VFA – Construction Technology Labs
Location: Rinnböckstrasse 15
A-1110 Vienna
Phone: (+43 1) 79514-8039
Fax: (+43 1) 79514-99-8039
e-mail: post@ma39.wien.gv.at
Website: www.ma39.wien.at

MA 39 – VFA 2017-0283.01

Vienna, 10 March 2017

Extension of the Validity of the Classification Report MA 39 – VFA 2016-0836.01
“Classification Report concerning Reaction to Fire Performance of High-Pressure Laminate
Panels Designated as “MAX Exterior F-Quality””

Commissioned by: FunderMax GmbH
Date of Commission: 9 March 2017
Date of Classification Report: 11 July 2016
Summary assessment: Pursuant to ÖNORM EN 13501-1 the above-mentioned construction products are classified
B – s2, d0
in respect of the reaction to fire performance.

The validity of the classification report is extended by further 5 years. The validity ends on 9 May 2022 at the latest. In the event that fundamental testing or assessment criteria change, the period of validity will end before the expiry of this deadline. Moreover, the report will cease to be valid if the client makes inadmissible technical changes in the product. This extension is only valid in connection with the original classification report – particularly the scope of direct application has to be respected.

The Case Manager:

The Head of the Laboratory
authorised to sign:

The Head of the Research Centre,
Laboratory and Certification Services:

Dipl.-Ing. Dieter Werner, MSc
Oberstadtbaurat

Dipl.-Ing. Dr. techn. Christian Pöhn
Senatsrat

Dipl.-Ing. Georg Pommer
Senatsrat



Tests relate exclusively to the test material.

All pages of this report are stamped with the official seal of the City of Vienna.

Publications and extracts from this report require the prior written consent of MA 39. Please note that the currently valid General Terms and Conditions of MA 39 can be found on the Internet at <http://www.ma39.wien.at>.

Certified by Quality Austria pursuant to the requirements of ÖNORM EN ISO 9001:2008 and ÖNORM EN ISO 14001:2015.

Accredited as a testing and inspection body pursuant to the Austrian Act on Accreditation (AkkG) under an official decree of the Federal Ministry of Science, Research and Economy based on OVE/ÖNORM EN ISO/IEC 17025 and OVE/ÖNORM EN ISO/IEC 17020.

Notified body based on construction products regulation (89/106/EWG of 21.12.1988) with identification no. 1140.





FunderMax GmbH
Industriezentrum NÖ-Süd
2355 Wr. Neudorf

City of Vienna Administration
MUNICIPAL DEPARTMENT 39
Research Centre, Laboratory
and Certification Services
VFA – Construction Technology Labs
Address: Rinnböckstrasse 15
A-1110 Vienna
Tel.: (+43 1) 79514-8039
Fax: (+43 1) 79514-99-8039
E-Mail: post@ma39.wien.gv.at
Homepage: www.ma39.wien.at

MA 39 – VFA 2016-0836.01

Wien, 11 July 2016

Classification Report concerning Reaction to Fire Performance of High-Pressure Laminate Panels Designated as “MAX Exterior F-Quality”

Commissioned by: FunderMax GmbH

Date of commission: 18 July 2011

Test material: High-pressure laminate panels designated as “MAX Exterior F-Quality” with a density of $\geq 1,35 \text{ g/cm}^3$, 6 mm thick, described in the following test reports on which the classification is based

MA 39 – VFA 2012-0652.02

(test pursuant to Austrian standard ÖNORM EN 13823)

MA 39 – VFA 2012-0652.03

(test pursuant to Austrian standard ÖNORM EN ISO 11925-2)

Summary assessment: Pursuant to ÖNORM EN 13501-1 the above-mentioned construction products are classified

B – s2, d0

in respect of the reaction to fire performance.

This report replaces report MA 39 - VFA 2012-0652.01 of 9 may 2012. The replacement of the original and all copies lies within the responsibility of the customer.

This report consists of 4 pages.

Prüfungen beziehen sich ausschließlich auf die Prüfgegenstände.

Alle Seiten des Berichtes sind mit dem Amtssiegel der Stadt Wien versehen.

Veröffentlichung und Auszüge bedürfen der schriftlichen Bewilligung der MA 39.
Bitte beachten Sie die derzeit gültigen Allgemeinen Geschäftsbedingungen der MA 39
im Internet unter <http://www.ma39.wien.at>.

Zertifiziert gemäß den Forderungen der ÖNORM EN ISO 9001:2008 und der ÖNORM EN ISO 14001:2004 durch die Quality Austria.

Akkreditiert als Prüf- und Inspektionsstelle gemäß AkkG per Bescheid des Bundesministeriums für Wissenschaft, Forschung und Wirtschaft auf Basis ÖVE/ÖNORM EN ISO/IEC 17025 und ÖVE/ÖNORM EN ISO/IEC 17020.

Akkreditiert als Zertifizierungsstelle gemäß AkkG per Bescheid des Bundesministeriums für Wissenschaft, Forschung und Wirtschaft auf Basis ÖVE/ÖNORM EN ISO/IEC 17065.

Notifizierte Stelle (Notified body) gemäß Verordnung (EU) Nr. 305/2011 (Bauprodukteverordnung) unter der Kennnummer 1139.



1 Introduction

This classification report defines the classification assigned in conformity with the procedure set forth in ÖNORM EN 13501-1 to the construction product “high-pressure laminate panels”, such product being designated as “MAX Exterior F-Quality”, 6 mm thick, with a density of $\geq 1.35 \text{ g/cm}^3$, which was stored up to mass constancy in standard atmosphere pursuant to ÖNORM EN 13238, as described in the test reports listed under 3.1.

2 Details of the Construction Product(s) Classified

The construction product/s is/are fully described in the test reports listed in 3.1, on which the classification is based.

3 Test Reports and Test Results on which the Classification is Based

3.1 Test Reports

Name of Lab	Test commissioned by	File numbers of test reports	Test procedures
MA 39 Rinnböckstrasse 15 1110 Vienna Austria	FunderMax GmbH IZ-NÖ Süd Strasse 3 2355 Wiener Neudorf Austria	MA 39 – VFA 2012-0652.02	ÖNORM EN 13823
		MA 39 – VFA 2012-0652.03	ÖNORM EN ISO 11925-2

3.2 Test Results

High-pressure laminate panels designated as “MAX Exterior F-Quality”, with a density of $\geq 1,35 \text{ g/cm}^3$, 6 mm thick:

Test procedure	Parameters	Number of test runs	Test results	
			Continuous parameters Mean value	Parameter readings
ÖNORM EN 13823	FIGRA _{0.2 MJ} [W/s]	3	92.1	---
	FIGRA _{0.4 MJ} [W/s]		92.1	---
	LFS < edge of specimen			Y
	THR _{600s} [MJ]		4.0	---
	SMOGRA [m ² /s ²]		13.2	---
	TSP _{600s} [m ²]		80.3	---
	Fall of flaming droplets/particles			N

Test procedure	Parameters	Number of test runs	Test results	
			Continuous parameters Mean value	Parameter readings
ÖNORM EN ISO 11925-2 Surface flaming 30 second flame attack Fall of flaming droplets/particles	$F_s \leq 150$ mm ignition of filter paper	6 each	---	Y
			---	N

4 Classification and Scope of Direct Application

This classification was carried out in accordance with Austrian standard ÖNORM EN 13501-1.

4.1 Classification

The construction product (described in the test reports listed above) is classified as follows in terms of reaction to fire performance, smoke production and fall of flaming droplets/particles:

Reaction to fire performance		Smoke production			Flaming droplets/particles	
B	-	s	2	,	d	0

4.2 Scope of Application

This classification applies to the construction product/s described in the above-mentioned test reports in a range of thicknesses 6.0 mm to 20.0 mm.

Moreover, it relates to the mounting of panels on all types of frames (including e.g. aluminium frames, steel frames). Panels have to be fastened mechanically and narrower distances between fastened panels than those used in the test runs are admissible.

The classification applies for use of the construction product with a backing of rockwool (density 30 kg/m³ - 70 kg/m³, melting point > 1000°C) and without backing.

Wood-based panels and all boards conforming to Euro Classes A1 or A2 may be used as carrier boards.

Open edges are permitted in final use. All types of closed edges (e.g. using profiles, springs) are also permitted.

5 Restrictions

5.1 General

This classification report is valid for a period of 5 years, it will thus expire on 9 May 2017. Any provisions in European product standards as may restrict the period of validity hereof must be observed.

In the event that fundamental testing or assessment criteria change, the period of validity will end before the expiry of this deadline. Moreover, the report will cease to be valid if the client makes inadmissible technical changes in the product.

5.2 Caveat

This document does not serve the purpose of type certification or certification of the construction product.

The Case Manager:

The Head of the Laboratory
authorised to sign:


The Head of the Research Centre,
Laboratory and Certification Services:



Dipl.-Ing. D. Werner, MSc



Dipl.-Ing. Dr. techn. C. Pöhn

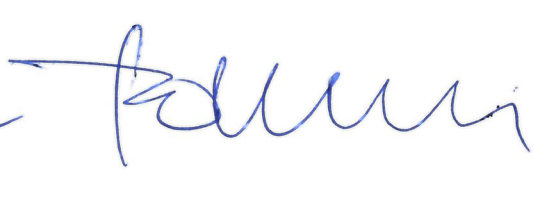

Dipl.-Ing. G. Pommer